


DASH NO.	W CODE	MADE FROM
----------	--------	-----------

REVISIONS	
ISSUE	CHANGES
13	CN 33334 E REDRAWN WJM 08/26/91
14	CN 37544 C KH 02/20/98
15	CN 38562 E TML 05/28/02
16	CN 39736 C DCT 12/18/6
U	ER 7276 DCT 5/4/8

1065-1QD

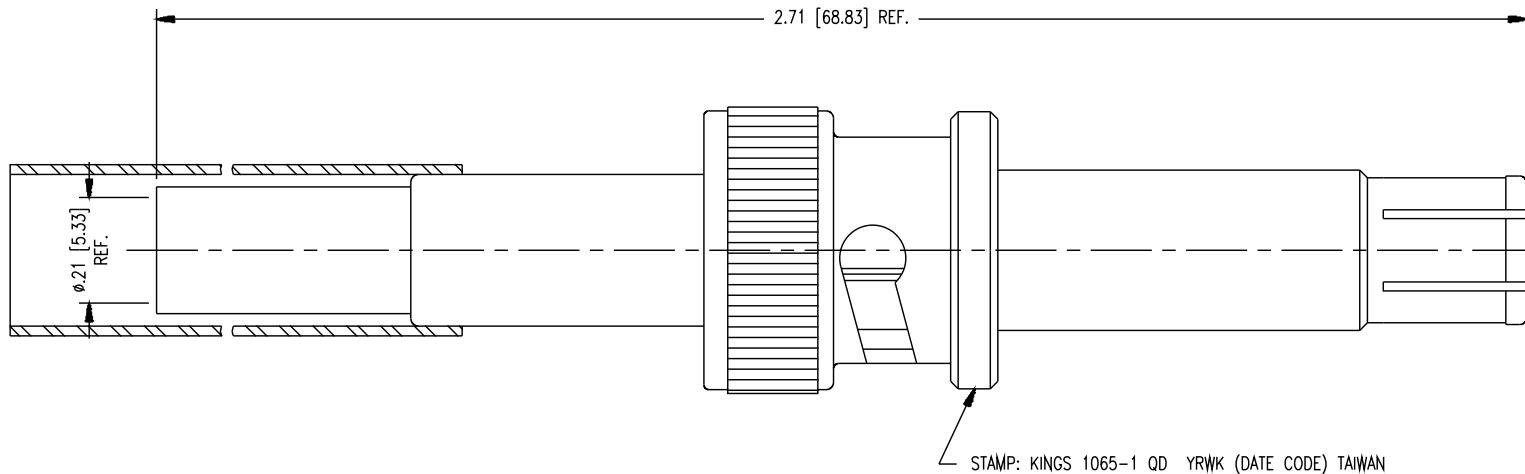

NOTES:


- FOR USE WITH RG-58, 58A & 58C/U CABLE.
- FOR CABLING INSTRUCTIONS SEE 3-7-1.
- FOR CRIMPING USE DIE KTH-2001.
- MATERIALS:**
 INSULATOR: HIGH DENSITY POLYETHYLENE, ASTM-D4976
 GASKET: SILICONE RUBBER, A-A-59588
 HEAT SHRINK TUBING: POLYOLEFIN, PER MIL-I-23053/5 COLOR: WHITE
 K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
 K-GRIP BODY: BRASS, ASTM-B16
 WASHERS: BRASS, ASTM-B16
 ALL OTHER METAL PARTS: BER. COPPER, ASTM-B-196
- FINISHES:**
 CENTER CONTACT: HARD GOLD PLATE, PER ASTM-B488
 SPRING WASHER: SILVER PLATE, PER ASTM-B700
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:**
 WORKING VOLTAGE: 10 KV DC
- DIMENSIONS IN INCHES [MM].**

UNLESS OTHERWISE SPECIFIED

- ALL DIMENSIONS IN INCHES [MILLIMETERS].
- TOLERANCES:**
 .xxx ±.004 .xx ±.010
 [.xxx ±.10] [.xx ±.25]
 FRACTIONS: X/Y ±.010 [.25] ANGLES: ± 1'

★ CRITICAL DIMENSIONS

CUSTOMER
SALES DRAWING

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
PLUG. 10KV	
DRAWN MJB	DATE 08/26/61
DESIGN MJB	DATE 09/04/61
APPR.	DATE
	
1065-1QD	