



NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SPECIFICATIONS, SEE SD74-0000
2. MATERIAL SPECIFICATIONS:  
 BODY: BRASS PER ASTM B16  
 RETAINING RING: BERYLLIUM COPPER PER ASTM B194
3. FINISH SPECIFICATION:  
 BODY: .000030 MIN. GOLD PER ASTM B488 OVER  
 .000050 MIN. NICKEL PER QQ-N-290  
 RETAINING RING: .000100 MIN. NICKEL PER QQ-N-290

REV	DESCRIPTION	BY DATE	APPD
B	REVISED PER ER27689	DAO 09/13/10	WPM

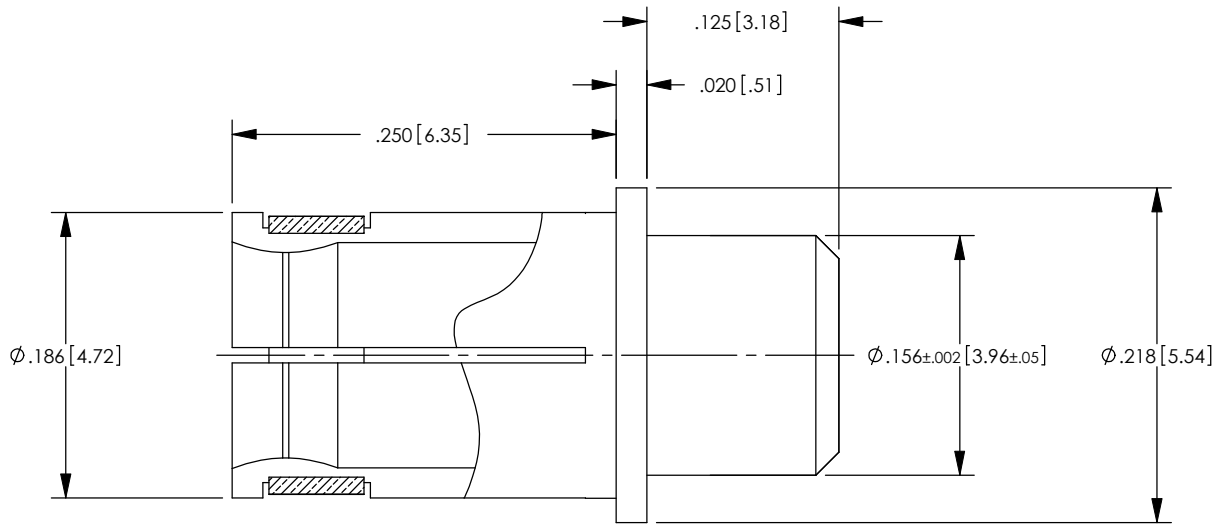

Ø.175±.002 [4.45±.05]



RECOMMENDED MOUNTING HOLE

CATALOG P/N: 01509

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 8:1				Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
<b>CUSTOMER DRAWING</b>							
DRAWN	DATE	APPROVED	DATE	POWER SNAP PC BOARD THRU HOLE 40 AMP (RoHS)			
JJN	03/31/10	RJW	03/31/10				
APPROVED	DATE	APPROVED	DATE	<b>A</b>	SD01509	SHT 1 OF 1	REV <b>B</b>
DAO	09/17/10	WPM	09/17/10				