


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD74-0000.
2. MATERIAL SPECIFICATIONS: BRASS PER ASTM B16.
3. FINISH SPECIFICATIONS:
.000030 MIN. GOLD PER ASTM B488 OVER .000050 MIN. NICKEL PER AMS QQ-N-290.
4. ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 20 AMPS
5. SUGGESTED FOR USE WITH 14 GA WIRE OR EQUIVALENT.
6. REFER TO CAP10-01 FOR CABLE ASSEMBLY PROCEDURE.

REV	DESCRIPTION	BY DATE	APPD
E	REVISED PER ER11418	DAO 01/07/09	DAO

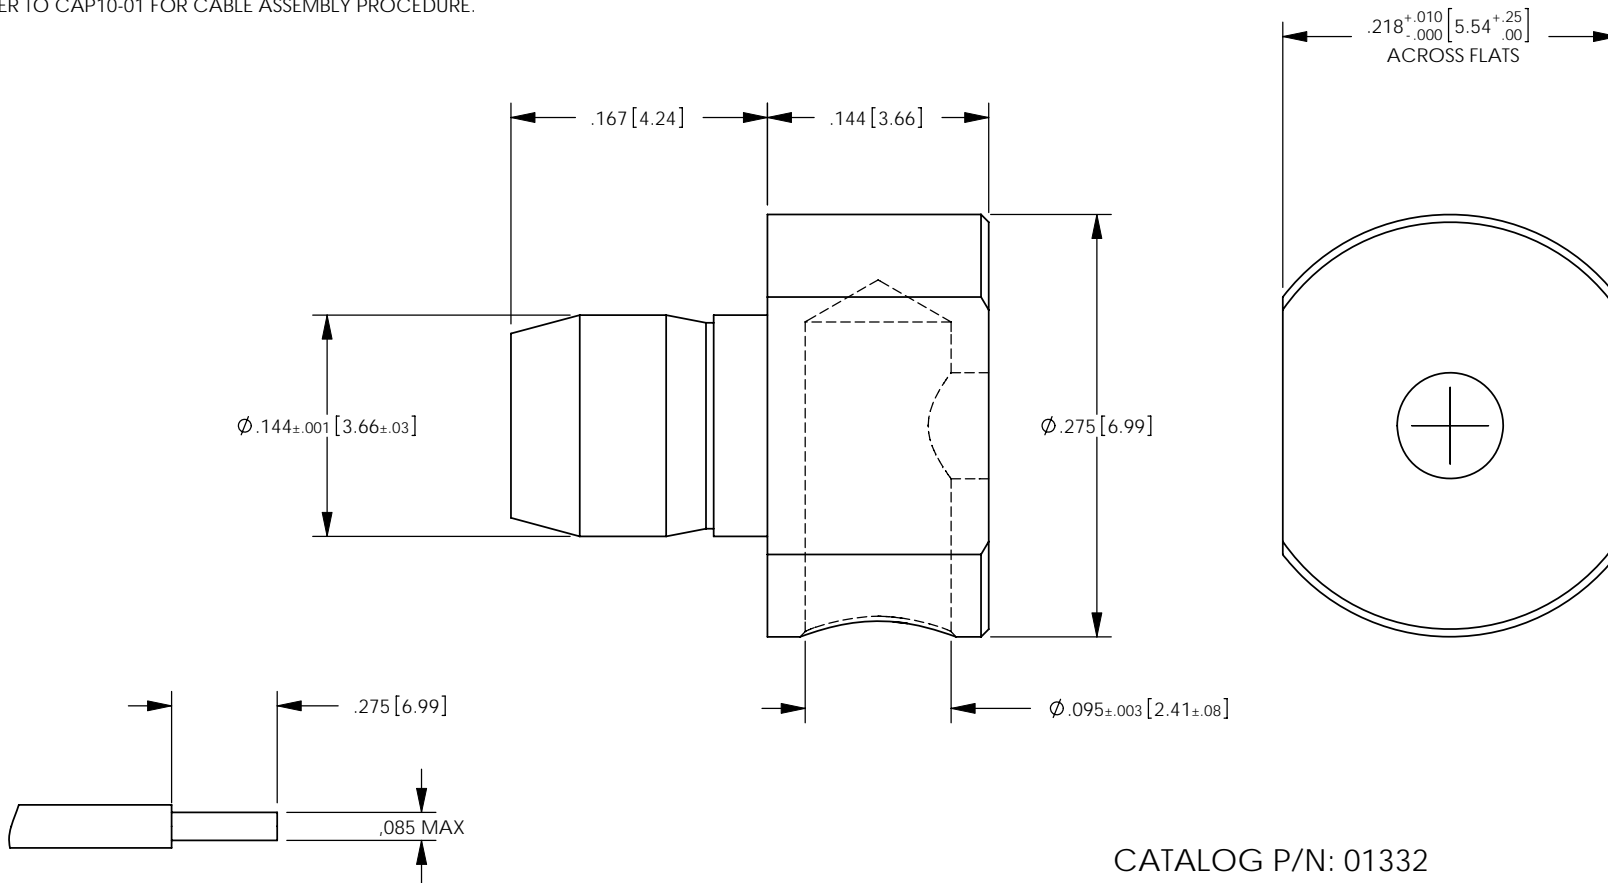

RECOMMENDED CABLE TRIM DIMENSIONS
SCALE: 2:1

CATALOG P/N: 01332

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 8:1				 WINCHESTER ELECTRONICS Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492						
CUSTOMER SALES DRAWING				THIRD ANGLE 		POWERSNAP RIGHT ANGLE SOLDER MOUNT 14 AWG, 20 AMP				
DRAWN	DATE	APPROVED	DATE	APPROVED	DATE	A	SD01332	SHT 1	OF 1	REV E
KJT	01/31/02	JWH	02/01/02	JED	02/01/02					
APPROVED	DATE	APPROVED	DATE	JEM	02/01/02					